


Model 5000 COBRA




K e g i o m
l i f t i n g

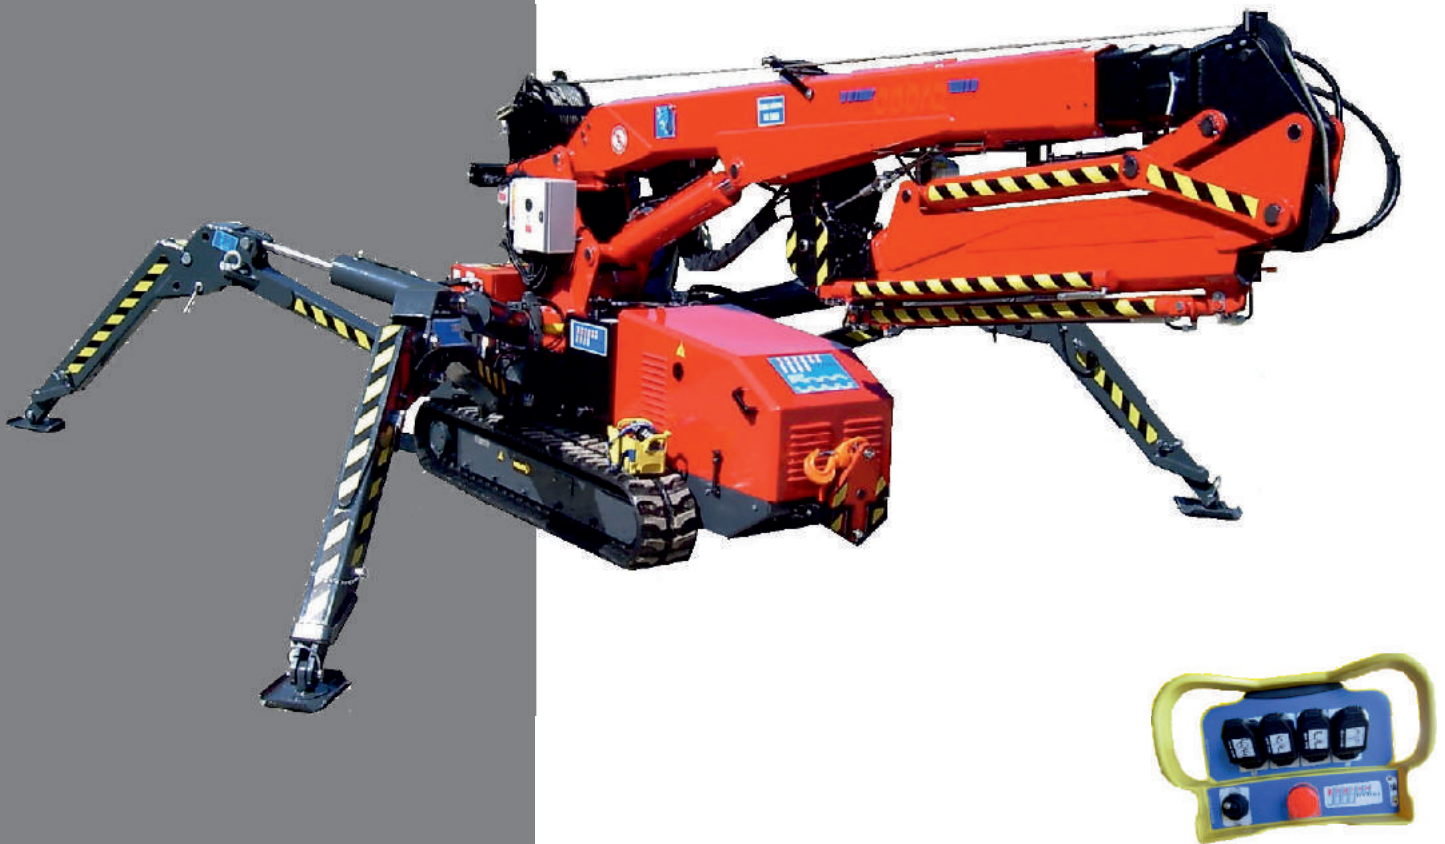



gru . crane . kran . grue . grúa . guindaste

Tabella portata (stabilizzatori tutti estesi) - Lifting Capacity Chart (outriggers fully extended) - Tableau de Charge (stabilisateurs étendus max.)
Hublasttabelle (Abstützung ganz ausgefahren) - Tablero de Carga (estabilizadores a la máxima extensión)

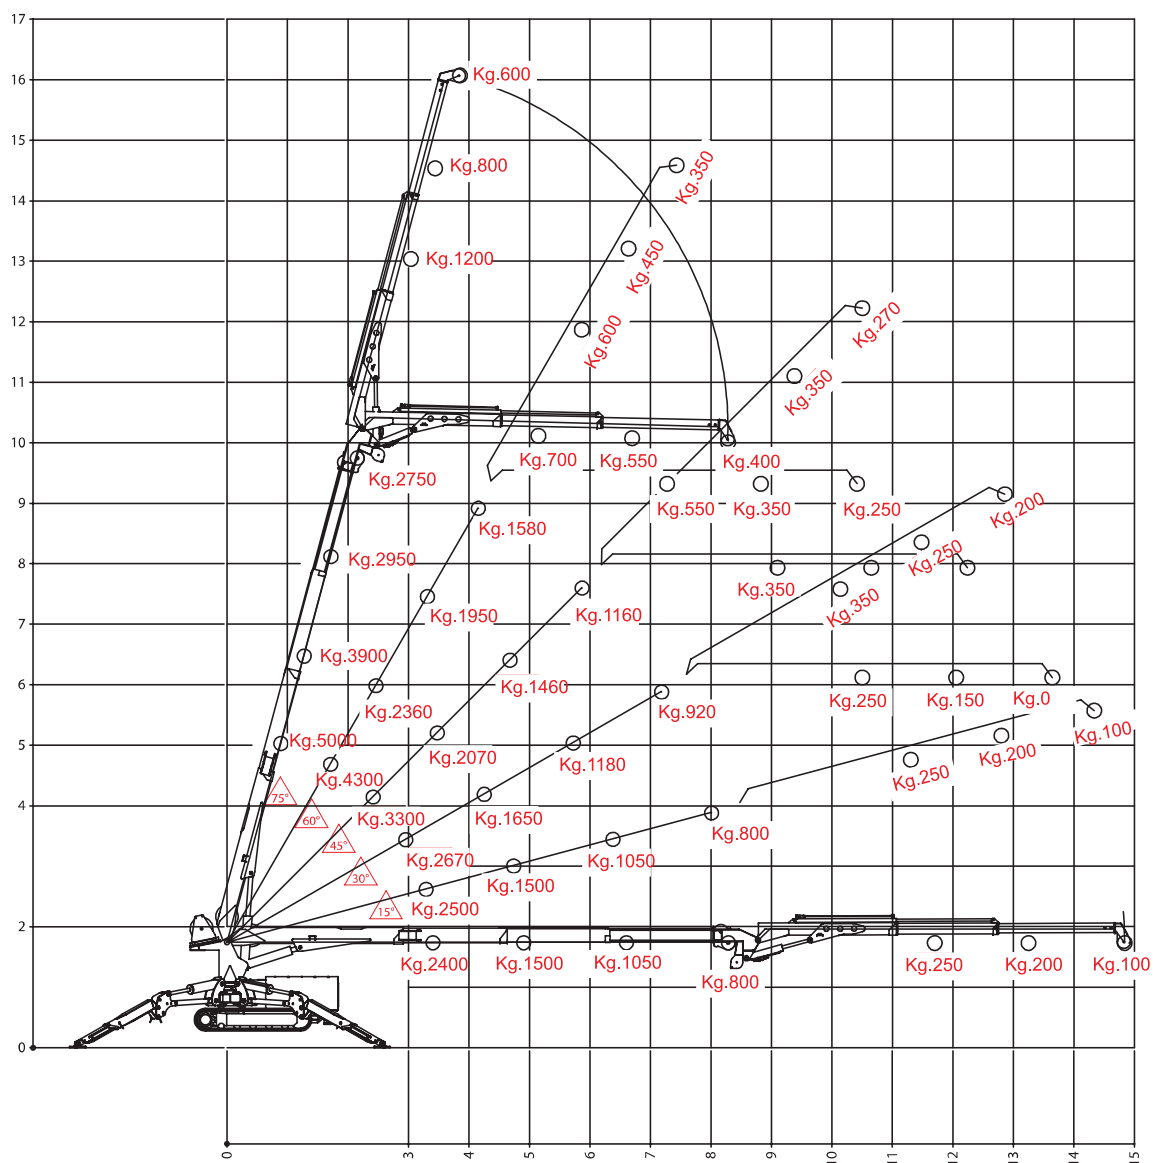

Dimensioni Generali - General Dimensions - Dimensions Générales - Gesamtabmessungen - Dimensiones Generales

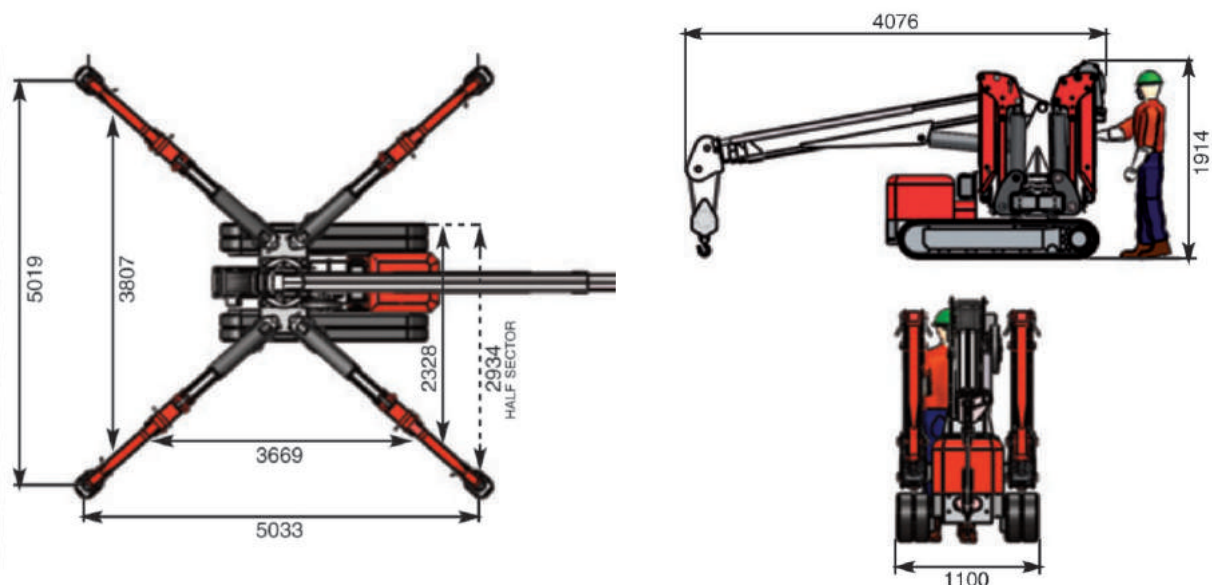


					
Motore benzina avviamento elettr.	Motor petrol electric starting	Benzinmotor Elektrostarter	Moteur à essence démarrage électr.	Motor gasolina arranque electr.	Honda Gx690 22HP 2 cylinders cooled to air
Capacità serbatoio	Tank capacity	Tankkapazität	Capacité réservoir	Capacidad tanque	15 l.
Trazione idrostatica	Drive system hydrostatics	Hydrostatischer Antrieb	Transmission hydrostatique	Tracción hidrostatica	Km/h 2,00
Angolo di rampa	Ramp angle	Steigungswinkel	Rampe admissible	Rincón de tramo	30°
Cingoli in gomma	Tracks in rubber	Raupenkettens aus Gummi	Chenilles en caoutchouc	Orugas de goma	
Portata max	Max lifting	Max.Tragfähigkeit	Capacité maximum	Carga máxima	5000 Kg.
Sbraccio massimo	Max working radius	Max.Ausladung	Longueur de flèche max	Alcance lateral máx.	14,90 m.
Altezza massima di lavoro	Max.working height	Arbeitshöhe	Hauteur de levage max.	Altura max. de trabajo	16 m.
Verricello	Winch	Seilwinde	Treuil	Cabrestante	Single line kg 2200
Fune	Winch rope	Seil	Câble	Cable	50 m. Ø 12 mm.
Rotazione	Rotation	Umdrehung	Rotation	Rotación	360°
Stabilizzatori	Outriggers	Abstützung	Stabilisateurs	Estabilizadores	Hydraulic multi position
Pressione al suolo	Max track loading	Bodendruck	Pression au sol	Presión de apoyo	0,40 Kg/cm²
Comandi elettrico proporzionali	Electricals proportionals controls	Elektrische proportionale Steuerung	Commandes électriques proportionnelles	Mandos eléctricos proporcionales	With remote control
Limitatore di momento	Automatic limiting device	Automatische Grenzlastregelung	Limiteur de charge	Limitador de momento	Elettronico - Electronic Elektronisch - Électronique Electrónico
Pressione max	Max pressure	Max Betriebsdruck	Pression max	Max presión	230 bar
Dimensioni Gru	Dimensions crane	Abmessungen Kran	Dimensions de la grue	Dimensiones grúa	4076 x 1100 x 1910 mm.
Peso gru	Weight crane	Gewicht kran	Poids grue	Peso grúa	2550 Kg.

OPTIONALS

Fly - jib m. 3,50 manuale	Fly - jib m. 3,50 manual	Fly - jib m. 3,50 handb-uch	Fly - jib m. 3,50 manuel	Fly - jib m. 3,50 manual	80 Kg.
Fly - jib idraulico di m. 6,50	Hydraulic fly - jib of m. 6,50	Hydraulischer fly - jib von m. 6,50	Fly - jib hydraulique de m. 6,50	Plumín hidráulico de m. 6,50	220 Kg.
Elettropompa 380 V.	Electric pump 380 V.	Elektrische pompe 380 V.	Pompe Électrique 380 V.	Bomba eléctrica 380 V.	45 Kg.
Cestello 2 persone	Basket 2 people	Personen korb 2	Nacelle 2 gens	Cesta 2 personas	



PUÒ SALIRE E SCENDERE DAL VEICOLO DI TRASPORTO CON GLI STABILIZZATORI
 SELF-LOADING/UNLOADING ON THE TRUCK WITH OUTRIGGERS.
 KANN STEIGEN UND ERHALTEN VOM TRANSPORTFAHRZEUG MIT DEN STABILISATOREN DES KRAN
 PEUT MONTER ET DESCENDRE DU VÉHICULE DE TRANSPORT GRÂCE À SES STABILISATEURS
 PUEDE SUBIR Y BAJAR DEL VEHÍCULO DE TRANSPORTE CON LOS ESTABILIZADORES

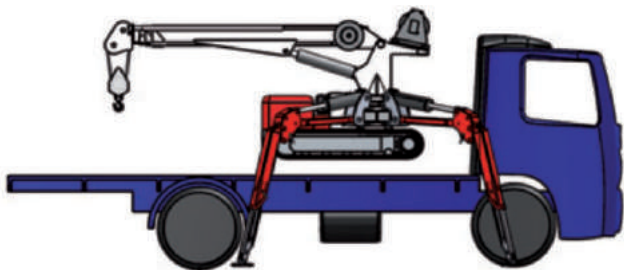

Dealer



Kegiom Lifting S.r.l. - Via Duchessa di Galliera, 12
 15076 Ovada (AL) - Italy
 Tel./Fax (+39) 0143 822031 - 46541
 e-mail: info@kegiom.com - web: www.kegiom.com
 C.F. e P. Iva 01956070062 - C.C.I.A.A. Alessandria n. 213887

Kegiom si riserva il diritto di apportare qualsiasi modifica senza preavviso nè responsabilità.
 Kegiom reserves the right to make changes without prior notice or responsibility.

